



# WORLDWIDE ELECTRIC MOTOR DATA SHEET

## WWE30-36-286JP



HORSEPOWER	30		
RPM / POLES	3600 / 2		
VOLTAGE / PHASE	230 / 460 V / 3		
FRAME	286JP		
ENCLOSURE / DEGREE OF PROTECTION	TEFC / IP54		
FREQUENCY	60 HZ Suitable For 50 HZ Operation With 1.0 SF		
FULL LOAD SPEED	3555 RPM		
SERVICE FACTOR	1.15		
INSULATION CLASS	F		
FULL LOAD AMPS; 230 / 460	65.8 / 32.9 A		
LOCKED ROTOR AMPS (STARTING); 230 / 460	436 / 218 A		
NO LOAD CURRENT	16.8 / 8.4 A		
NEMA CODE LETTER	G		
EFFICIENCY / POWER FACTOR	<u>LOAD</u>	<u>EFF.</u>	<u>P.F.</u>
	100%	91.0%	0.89
	75%	90.7%	0.87
	50%	89.5%	0.83
DUTY CYCLE	CONTINUOUS		
TORQUE	<u>FULL LOAD</u>	<u>LRT</u>	<u>BDT</u>
	43.59 lb.ft.	200%	290%
SLIP	1.25%		
NEMA DESIGN	B		
MOMENT OF INERTIA	1.74 lb.ft. <sup>2</sup>		
MAX. TIME LOCKED ROTOR (Hot)	20 Seconds		
MAX. AMBIENT TEMPERATURE	40° C		
MAX. ELEVATION	3300 Ft. Above Sea Level		
TEMPERATURE RISE (At Full Load)	80° C		
DE BEARING	6311		
ODE BEARING	6309		
REGREASING INT. - DE BEARING	3,500 Hours (0.64 oz.)		
REGREASING INT. - ODE BEARING	4,000 Hours (0.46 oz.)		
GREASE TYPE	Mobil Polyrex EM		
MOUNTING	F1		
ROTATION	Bi-Directional		
SHAFT MATERIAL	1045 Carbon Steel		
CONNECTION DIAGRAM	230 / 460 V - 12 Lead Δ		
APPROXIMATE WEIGHT	523 Lbs.		




CC006A





# WORLDWIDE ELECTRIC MOTOR DRAWING

## WWE-286JP

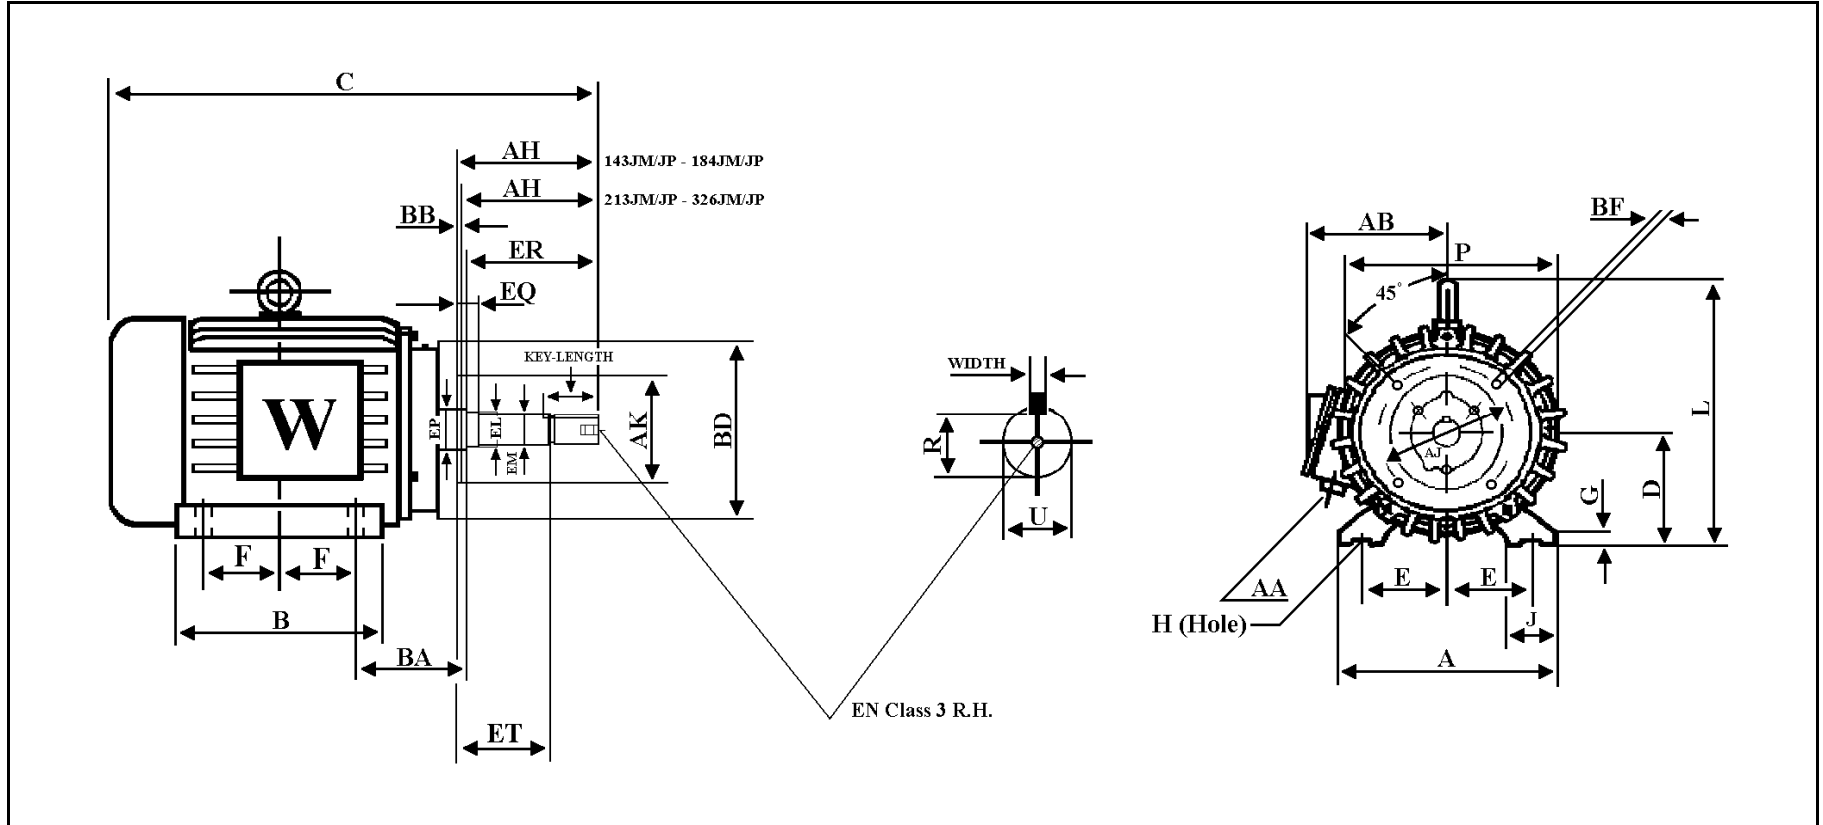

DIMENSIONS - INCHES

MOUNTING					A	B	C	D	G	J	P	L	AH	AB	EQ	AA
E	2F1	2F2	H	BA												
5.5	9.5	11	0.53	4.75	14	14	31.85	7	0.866	2.76	14.17	16.33	8.125	12	2.375	1.5

KEY		KEYSET		FLANGE						ET	EM	EL	EP	ER	EN
WIDTH	LENGTH	R	U	AK	AJ	BF	BB	BD							
0.252	2.56	1.112	1.2495	12.5	11	5/8-11	0.25	13.2	5.875	1.375	1.75	2.165	8.4	1/2-13	