



WORLDWIDE ELECTRIC MOTOR DATA SHEET

WWE40-36-286JM



HORSEPOWER	40		
RPM / POLES	3600 / 2		
VOLTAGE / PHASE	230 / 460 V / 3		
FRAME	286JM		
ENCLOSURE / DEGREE OF PROTECTION	TEFC / IP54		
FREQUENCY	60 HZ Suitable For 50 HZ Operation With 1.0 SF		
FULL LOAD SPEED	3555 RPM		
SERVICE FACTOR	1.15		
INSULATION CLASS	F		
FULL LOAD AMPS; 230 / 460	90.0 / 45.0 A		
LOCKED ROTOR AMPS (STARTING); 230 / 460	580 / 290 A		
NO LOAD CURRENT	21.4 / 10.7 A		
NEMA CODE LETTER	G		
EFFICIENCY / POWER FACTOR	<u>LOAD</u>	<u>EFF.</u>	<u>P.F.</u>
	100%	91.7%	0.88
	75%	91.5%	0.89
	50%	92.3%	0.84
DUTY CYCLE	CONTINUOUS		
TORQUE	<u>FULL LOAD</u>	<u>LRT</u>	<u>BDT</u>
	58.12 lb.ft.	160%	280%
SLIP	1.44%		
NEMA DESIGN	B		
MOMENT OF INERTIA	1.93 lb.ft. ²		
MAX. TIME LOCKED ROTOR (Hot)	20 Seconds		
MAX. AMBIENT TEMPERATURE	40° C		
MAX. ELEVATION	3300 Ft. Above Sea Level		
TEMPERATURE RISE (At Full Load)	80° C		
DE BEARING	6311		
ODE BEARING	6309		
REGREASING INT. - DE BEARING	3,500 Hours (0.64 oz.)		
REGREASING INT. - ODE BEARING	4,000 Hours (0.46 oz.)		
GREASE TYPE	Mobil Polyrex EM		
MOUNTING	F1		
ROTATION	Bi-Directional		
SHAFT MATERIAL	1045 Carbon Steel		
CONNECTION DIAGRAM	230 / 460 V - 12 Lead Δ		
APPROXIMATE WEIGHT	525 Lbs.		




CC006A



WORLDWIDE ELECTRIC MOTOR DRAWING

WWE-286JM

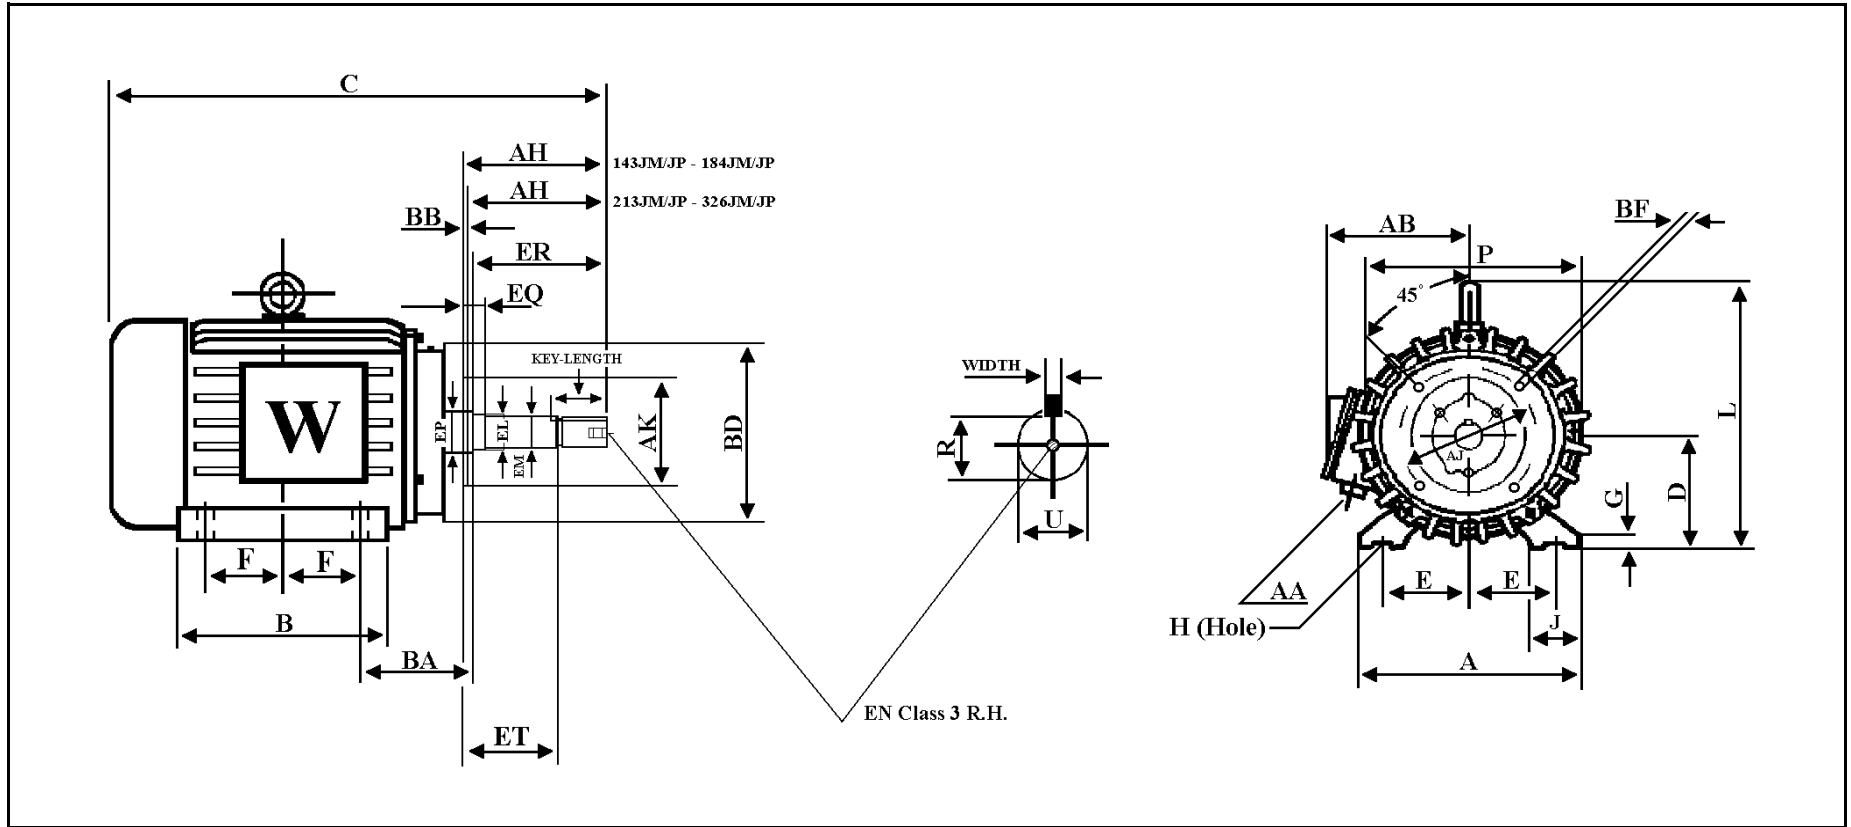

DIMENSIONS - INCHES

MOUNTING					A	B	C	D	G	J	P	L	AH	AB	EQ	AA
E	2F1	2F2	H	BA												
5.5	9.5	11	0.53	4.75	14	14	29	7	0.866	2.76	14.17	16.33	5.25	12	0.625	1.5

KEY		KEYSET		FLANGE					ET	EM	EL	EP	ER	EN
WIDTH	LENGTH	R	U	AK	AJ	BF	BB	BD						
0.252	2.56	1.112	1.2495	12.5	11	5/8-11	0.25	13.2	3	1.375	1.75	2.165	5.53	1/2-13